

TECHNOLOGY FOR ROW CULTURES



CLEMENS
TECHNOLOGIES

#INTELLIGENT
MECHANISATION

UNDER VINE CARE RADIUS




VITICULTURE



FRUIT GROWING



TREE NURSERIES



RADIUS SL

- Versatile cultivation options
- Environmentally friendly weed control
- For a wide range of soil conditions, vegetation and crop types
- Less drought stress, promoting soil revitalisation
- Clean work due to sensitive sensor technology
- Simple operation

TECHNICAL DATA

Oil requirement per unit: approx. 1.6-2.6 gal/min

Weight (without accessories): approx. 74 lbs
Weight blade share + sensor rod: approx. 6.2 - 11.2 lbs
(depending on length)

Length x width x height: approx. 16.9x11.8x19.7 in



RADIUS SL PLUS

- Versatile cultivation options
- Environmentally friendly weed control
- Thanks to a flexible flange point to which different working shafts and tools can be mounted
- For a wide range of soil conditions, vegetation and cultivation forms
- Clean work due to sensitive sensor technology
- Simple operation

TECHNICAL DATA

Oil requirement per unit: approx. 1.6-2.6 gal/min

Weight:
Basic device: approx. 77.2 lbs
Rotary tiller: approx. 50.7 lbs

Length x width x height: approx. 16.9x11.8x19.7 in



RADIUS D

- New generation of double-acting weed control, thanks to the proportional valve technology, which enables precise work
- By signaling the hydraulic valve, a tool can be hydraulically swung in and out hydraulically
- Navigating around the vine parallel to the speed of the tractor
- Work without damaging bark or roots

TECHNICAL DATA

Oil requirement per unit: approx. 0.8-4.2 gal/min

Weight:
Basic device: approx. 94.8 lbs

Blade share/sensor rod lengths: approx. 14.6/19.7/24.4 in

Length x width x height: approx. 6.7x13x17.3 in



RADIUS M

It does not require any electrical or hydraulic components, as the device works exclusively with spring force and thus mechanically. Its main areas of application are older existing plants with lighter soil conditions and vineyards with few weeds. It is also suitable for attachment to smaller caterpillars, robots & high-wheel tractors.

TECHNICAL DATA

Weight: approx. 50.7 lbs

Length x width x height:
approx. 16.9x11.8x19.7 in

UNDER VINE CARE

RADIUS SL



RADIUS SL AROUND-THE-VINE WEEDER is the environmentally friendly alternative to chemical weed control. The weeds rot in a natural manner. Less drought stress through destruction of the roots. Soil activation and promotion of optimum soil condition. Sensitive sensor technology for clean work around the vine. Rear, mid and front mounting possible, 1 or 2 sided versions. Versatility through different tools in front of the blade and additional devices.

- ✓ Ecofriendly
- ✓ Robust
- ✓ Simple handling



TECHNICAL DATA

Oil requirement per unit: approx. 1.6-2.6 gal/min

Weight (without accessories): approx. 74 lbs

Weight blade share + sensor rod: approx. 0.74 - 1.35 lbs
(depending on length)

Length x width x height: approx. 16.9 x 11.8 x 19.7 in



“

„We have been using the RADIUS for 30 years. We continue to trust the brand for its evolution and reliability.“

THIERRY AND FABIEN GÄIDE, WINERY JULIEN DE L'EMBISQUE (50 HA)

UNDER VINE CARE

RADIUS SL PLUS



The RADIUS SL PLUS (i.e. transition/ changeover shaft) uses the proved technology based on the RADIUS SL. In addition, the supplement of springs and the replacement of the shaft allow the installation of various attachments. For all attached tools the triggering off takes place through a sensor rod. With the help of adapters, the following attachments are quickly installed

RADIUS BLADE:
This feature should be used when no additional attachments are required in the area to be worked.

RADIUS BLADE in combination with a rotary cultivator: With this combination, the ground is broken up by the blade first and afterwards split and partly put away by the rotary cultivator, depending on the rotation speed. If the rotary cultivator is spinning too fast, too much soil could be thrown into the row.

- ✓ Ecofriendly
- ✓ Robust
- ✓ Versatile



TECHNICAL DATA

Oil requirement per unit: approx. 1.6 –2.6 gal/min

Weight:
Basic device: approx. 77 lbs
Rotary tiller: approx. 50.7 lbs

Length x width x height: approx. 16.9 x 11.8 x 19.7 in

Blade share/sensor rod lengths: 19.7/24.4 in



“

„After we had tried multiple machines, it was the CLEMENS machine that convinced us for the work we want to do.“

JEAN SARET, WINERY CAVE DES HAUTES VIGNES (75 HA)

UNDER VINE CARE RADIUS D



Radius D represents a new generation of double-acting weeders in the field of undervine care, thanks to the proportional valve technology that allows extremely precise work. This proportional technology opens up some more surprising application possibilities for the winegrower.

The innovative operation of the Radius D is based on the machine's ability to hydraulically swing a tool such as a clearing share in and out with a double movement, mechanically controlled by a signal from a very sensitive hydraulic valve that feels its way around the vine and operates in proportion to the speed of the tractor. The valve is practically in the middle of the unit, so there are no external hoses.

This proportional pivoting movement carefully guides the implement around the trunk of the vine without damaging the bark or the roots.

- ✓ Double acting
- ✓ Precise
- ✓ Innovative




TECHNICAL DATA

Oil requirement per unit: approx. 0.8 - 4.2 gal/min

Weight: approx. 94.8 lbs

Blade share/sensor rod lengths: approx. 14.6/19.7/24.4 in
Length x width x height: approx. 6.7x13x17.3 in

ACCESSORIES FOR RADIUS SL PLUS / D

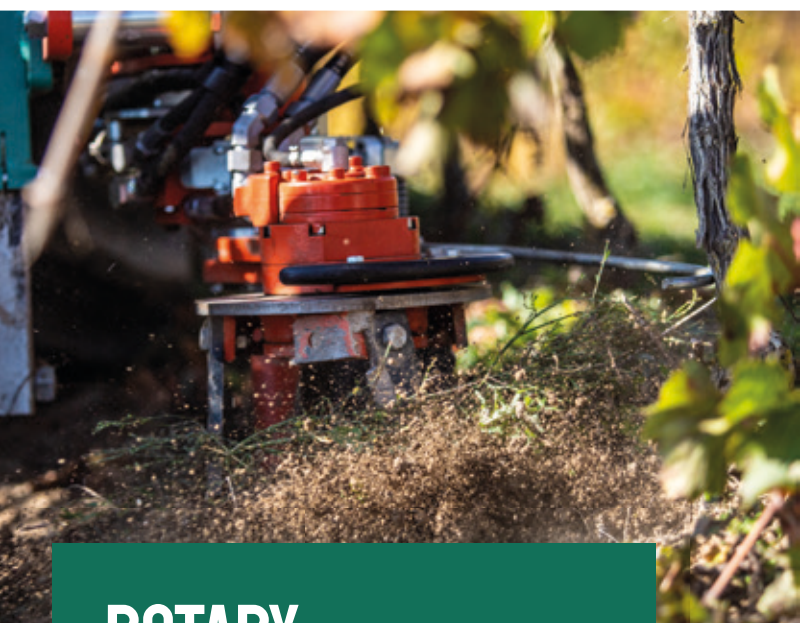

**ROTARY
TILLER**

We recommend to use the rotary cultivator in combination with the blade. First the soil is broken up by the blade and subsequently divided by the rotary cultivator and also cleared a little, depending on the speed of rotation. If the cultivator rotates too fast, it is possible that too much soil will be moved into the rows. In this case, this can however be counteracted with a soil and stone deflector. The rotary cultivator can be used without the blade if the conditions are not too extreme.

TECHNICAL DATA

Oil requirement: 9.2 gal/min
Weight: approx. 50.7 lbs



MOWER

The mower (Ø 15.7 in) pivots hydraulically between the vines, to mulch the vegetation with two blades. A protecting ring around the support disk prevents the vine from being damaged.

TECHNICAL DATA

Oil requirement: 5.3 gal/min
Weight: approx. 77.2 lbs




**DRIVEN
DISCS**

The discs (2 pcs.) are used to pull out soil of the vine interspace, for ploughing back or to ridge, for example for a better placement of slurry and dung. In addition to the sensor rod, the disc unit is equipped with a deflecting rail, which pushes the unit away from the vine in case the sensor rod is not triggered, thus preventing injuries and damages to the plant.

TECHNICAL DATA

Oil requirement: 5.3 gal/min
Weight: approx. 92.6 lbs

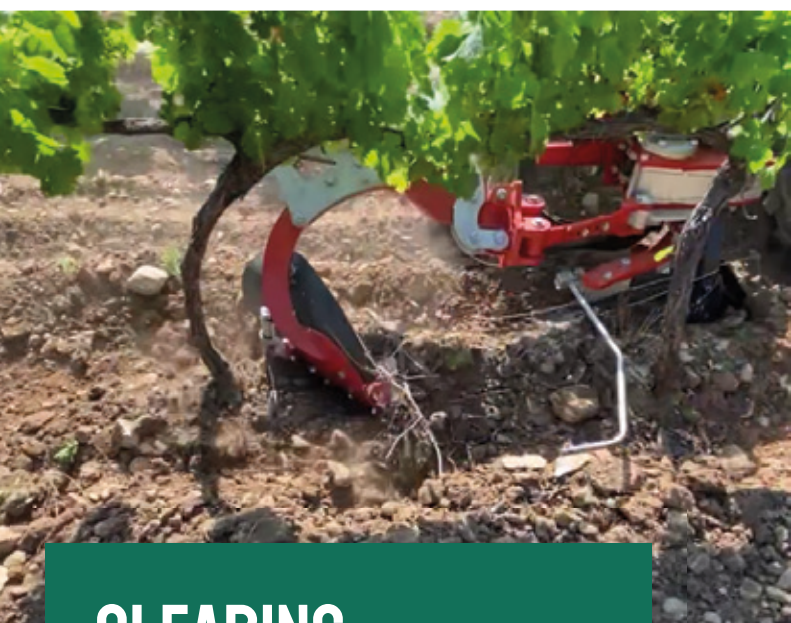


**CLEARING
BODY**

The CLEMENS clearing body is ideal for pulling dams and larger amounts of soil between the vines or trees in the row. The clearing body is elegantly guided around the vines with the help of the parallelogram and a sensor. The new CLEMENS RADIUS D is used as the base. Thanks to the sensing unit, the clearing body can be brought closer or further away from the vine/plant. If the clearing body nevertheless comes into contact with a plant, post or other obstacle, an overload safety device is triggered. Once the obstacle has been passed, the working tool is brought back into working position by a mechanism during travel. The resistance of the overload is adjustable via spring assemblies.




ACCESSORIES FOR RADIUS SL, SL PLUS & D

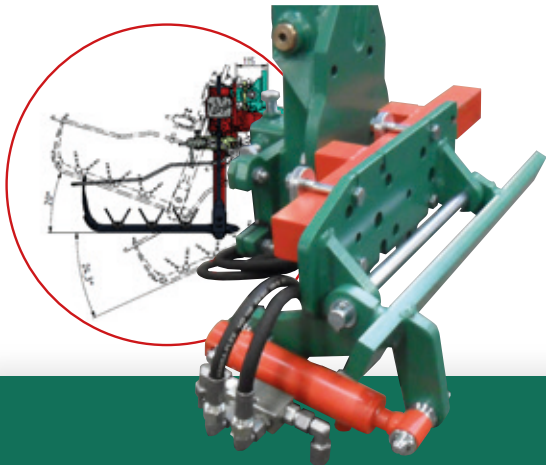

SIDE SLOPE
CORRECTION

With the slide slope correction you can change the angle of the RADIUS to adapt the position perfectly to the condition in slopes. You can choose between hydraulic or mechanical versions. This unit can be mounted on the tool carriers HEXAGON & SB Frames and also on the column lifters S2R and S5.

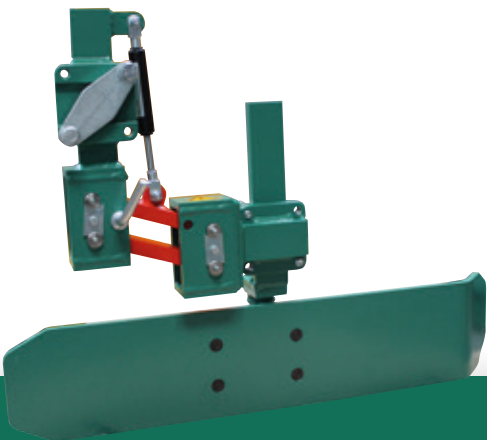

SOIL & STONE
DEFLECTOR

The soil & stone deflector is mounted behind the RADIUS to keep the cover crop clean of soil and stones. It comes with a parallelogram for ground adaptation. Different adjustment possibilities allow flexibility to achieve the desired results.



COMPACT
LIFTER

Very compact lifter to protect the grape zone. Lifting height 11.8 in



C.CONTROL
BASIC

The electromagnetic manual control allows the blade share to be controlled from the tractor cab. A pressure relief valve can be fitted as an option for the single-sided version. The 2-sided version is equipped with a flow divider, adjustable pressure relief valve and 2 toggle switches for separate remote control (right or left or right and left) of the two blade shares.



SENSING SHARE

To mount on the blade 14.6 / 19.7 / 24.4 in



PIVOTING CLOD BREAKER


To mount on the blade 14.6 / 19.7 / 24.4 in



CLEARING SHARE

To mount on the blade 14.6 / 19.7 / 24.4 in


TECHNOLOGY FOR RADIUS SL & SL PLUS

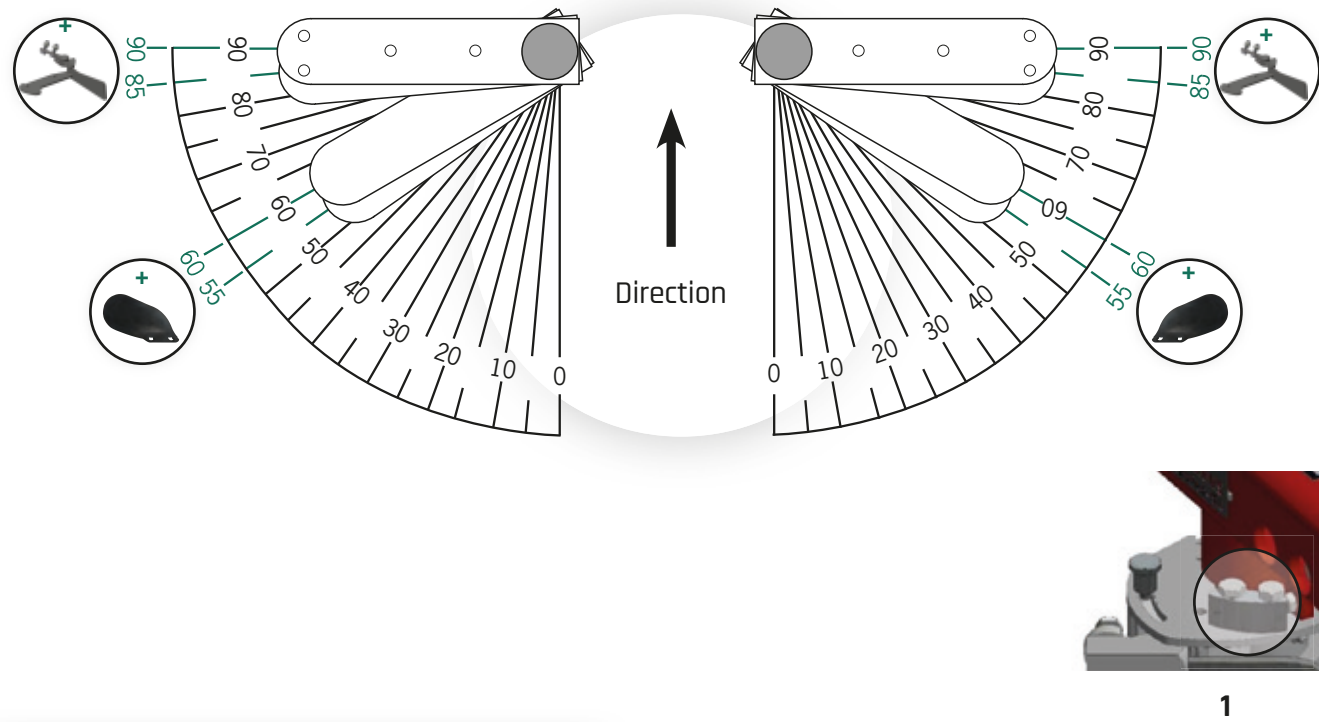

PULLING CUT

The blade of our Around-The-Vine Weeder can be adjusted to four different operating angles: 90°, 85°, 60° and 55°. With the Radius, it is possible to set a so-called „pulling cut“ of the blade.


This, in combination with the pivoting clod breakers, ensures that the loosened soil is spread optimally. To put the blade in this position, loosen the cylinder bolt (1) and screw it into the threaded hole provided.

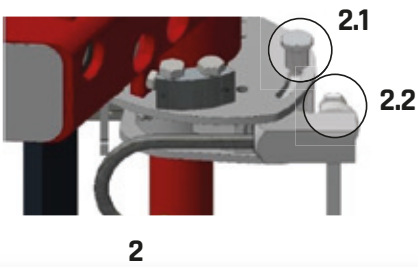

SENSOR ROD SETTINGS

The adjustment of the sensor rod is quick and easy: Lift the button (2.1) on the sensor unit and move the rod forwards or backwards as desired. When driving on a slope it is advantageous to move the sensor rod a little bit in front of the blade.

The same applies if the plants have grown somewhat obliquely (leaning forward) or if the driving speed is higher than 8 km / h. The sensor height can be adjusted using the screw and lock nut on the clamping piece (2.2)

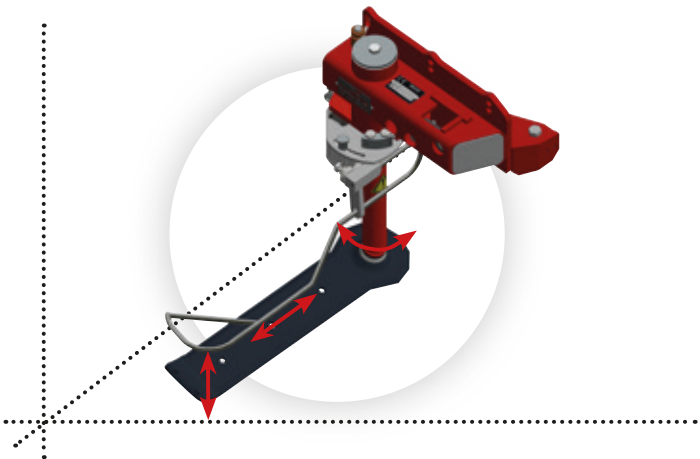

UNDER VINE CARE GSP DISK



VITICULTURE



FRUIT GROWING



TREE NURSERIES



- Simple operation for weeding under the vines
- Can be adapted to any soil type
- High driving speed
- Long-term weed control can be achieved by mulching
- Even water consumption because the capillaries are broken
- Reduces most if not all herbicide

- ✓ Hilling up
- ✓ Clearing
- ✓ Weed control



TECHNICAL DATA

Weight: approx. 59.5 lbs

Length x width x height: approx. 31.5 x 17.7 x 16.9 in

Diameter of the disk: 17.7 in



“

„Why trust CLEMENS equipment?
„It's the best equipment on the market!“

MR BOURGUE, WINERY DE LA CITADELLE (40 HA)

UNDER VINE CARE FINGER ROLLER



Integrated angle adjustment as is also the case with the disc harrow. The exterior angle can also be altered with no problems by reinserting the locking pins. Good distribution of force due to the different disc dimensions for the exterior and interior sprockets. As a result, both discs work in a sloped working angle at the same level. In comparison to the disc, we avoid creating a clear edge which can become a water channel on a steep slope.

- ✓ Combinable
- ✓ Erosion control
- ✓ Suitable for steep slopes



TECHNICAL DATA

Weight: approx. 88.2 lbs (Model with 2 disks)
approx. 110.2 lbs (Model with 3 disks)

Length x width incl. mounting bar
approx. 35 x 21.3 in

Depth: approx. 13 in (Model with 2 disks;)
approx. 18.1 in (Model with 3 disks;)

Working width depending on the position of the disks:
about 7.9 in (Model with 2 disks)
about 11.8 in (Model with 3 disks)

Working speed: approx. 4 to 5 mph
Thickness of the disks: 0.3 in



“

Because of the brand CLEMENS and the outstanding customer service through the distributor.

JEAN-LUC AND LOIC EVESQUE, WINERY DOMAINE SAINT ALBAN (60 HA)

UNDER VINE CARE FINGER HOE



In particular for young plantations or in existing plantations with very crooked stems in which more safety from the sensor is required, the finger hoe works directly around the plant and breaks up the island (also called the shadow) to gently remove the soil and weeds directly around the vine. Due to the special rubber compound, we work gently and with low wear. NOTE: In sandy soil, the finger hoe can also be used as an individual device. This is not possible in harder conditions. The finger hoes are available in various versions and different levels of stiffness and are driven in combination with a variety of machines for the undergrowth.

- ✓ For young plants
- ✓ Combinable
- ✓ Safe



TECHNICAL DATA

Weight: approx. 29 lbs (Model 14.6 in)
approx. 57 lbs (Model 21.3 in)
approx. 92.5 lbs (Model 27.6 in)

Length x width x height:
approx. 31.5 x 14.6 x 19.7 in (Model 14.6 in)
approx. 41.3 x 21.3 x 17.7 in (Model 21.3 in)
approx. 43.4 x 27.6 x 21.7 in (Model 27.6 in)

Colors / Strength: green/hard
yellow/medium



“

„Because of the quality and the good relationship to the distributor.“

JÉRÔME OBERTI, WINERY CHÂTEAU SAINTE ROSELINE (110 HA)

UNDER VINE CARE MULTICLEAN



The mulching brush has very strong and smooth cords that protect the vine. The conical aluminum shaft operates smoothly and with little vibration because of its special shape. It is therefore possible to carry out weeding effectively at 1100 rpm. With the MULTICLEAN you can remove both the water shoots and the weeds simultaneously with one machine.

- ✓ Low-vibration
- ✓ Sucker removal
- ✓ String device



TECHNICAL DATA

Hydraulic requirement: 1x single-acting

Oil requirement:

Model Standard: 4.2 – 6.3 gal/min

Model XS: 4.2 – 10.6 gal/min

Model XL: 5.8 – 6.3 gal/min

for two-sided operation series connection

Weight: Model Standard: approx. 88 lbs

Model XS: approx. 81.5 lbs

Model XL: approx. 198 lbs

Clearing height: Model Standard: approx. 22.8 in
(at 37,5° inclined position)

Model XS: approx. 15.7 in
(at 37,5° inclined position)

Model XL: approx. 18.1 in
(inclination not adjustable)



“

„Why do you trust the material from CLEMENS?“
„In my organic strategy for floor cleaning, the Multicleaner is a good choice. A safe solution, regardless of the weather in spring.“

MR JEAN, CHÂTEAU LES SIGNALS (75 HA)

TOOL CARRIERS SB FRAMES



SB COMPACT

The SB Compact is a robust solution for narrow alleys with many possible combinations. It can be mounted at the rear or at the front. Depending on the equipment, it covers three different working width ranging between 58.3 in and 99.2 in. Versatile accessories ensure adaptation to different conditions.

TECHNICAL DATA

Hydraulic requirement: 1x double-acting
Weight without attachments: approx. 331 lbs

Frame adjustment: 29.5 - 50.8 in
Three-point category: Cat. 1/2

SB 2

Ideal frame to accommodate the modern undervine care systems RADIUS SL, RADIUS SL PLUS or MULTICLEAN. The frame can be combined for rear or front mounting. The SB2 is available for working widths from 68.5 in to 126 in - depending on the equipment. The adjustment to the row width is done hydraulically.

TECHNICAL DATA

Hydraulic requirement: 1x double-acting
Weight without attachments: approx. 386 lbs

Frame adjustment: 39.8 - 79.1 in
Three-point category: Cat. 1/2

SB MONO

Would you like to work permanently with only a single-sided undervine care device, but as comfortably and safely as possible? For this case we have developed the SB MONO, which can be used for front and rear mounting. The hydraulic width adjustment can be easily converted from right to left. The base frame can be hydraulically adjusted by 19.7 in from 37.8 in to 57.5 in on one side by means of a cylinder, either to the right or to the left.

TECHNICAL DATA

Hydraulic requirement: 1x double-acting
Weight without attachments: approx. 227 lbs

Frame adjustment: 37.8 - 57.5 in
Three-point category: Cat. 1/2

SB ORCHARD

This frame can be adjusted from 88.9 - 128.3 in mm. The base frame serves as tool carrier for e.g. RADIUS, MULTICLEAN, GSP Disc or Finger Roller and can as well be equipped with lateral column lifters. The picture shows equipment with 2 double acting COMPACT Lifters. This structure allows the independent lifting of each side and also height adjustments in terraces. It is also advantageous for the work in Chevron shaped rows or in end rows. By lifting the side that is not being worked on, machines and headland are spared.

TECHNICAL DATA

Hydraulic requirement: 1x double-acting
Weight without attachments: approx. 386 lbs

Frame adjustment: 88.9 - 128.3 in
Three-point category: Cat. 1/2

TOOL CARRIER & CULTIVATOR HEXAGON



WITH
FINGER ROLLER

- For a better force distribution due to the different sizes of the discs.



WITH
RADIUS SL PLUS

- Front or rear mounted and also usable as a grubber



WITH
FINGER HOE

The solid hexagonal sectional frame is suitable for the hardest operating conditions. High-quality spring steel gives enormous strength. The special wing-chisel share undercuts cover crop without destroying it.



WITH
BISON TINES

Breaking up the tractor or harvester tracks. The curved shares lift the soil up to a depth of 15.7 in.

TECHNICAL DATA

Frame width:

Hexagonal base frame:
with hydr. adjustment width:

HEXAGON 723

27 in
30.8 - 46.5 in

HEXAGON 729

32.5 in
36.3 - 57.6 in

HEXAGON 724

44.9 in
48.8 - 82.7 in

Working width:

with chisel and wing share:

46.6 - 62.4 in

52.2 - 73.2 in

64.5 - 98.4 in

Row width:

with chisel and wing share:
with RADIUS SL blade 370:
with RADIUS SL blade 500:
with RADIUS SL blade 620:

59 - 74.8 in
59.2 - 75 in
70.3 - 86 in
79.7 - 95.5 in

63 - 84.6 in
64.8 - 85.8 in
75.8 - 96.8 in
85.2 - 106.3 in

78.7 - 114.2 in
76.8 - 111 in
88.2 - 112 in
97.6 - 131.5 in



“

„In my opinion, the best machine on the market. Very short frame, easy to assemble and disassemble. This is already my second purchase.“

OLIVIER AND RÉMI KLEIN, WINERY DOMAINE REMEJEANNE (35 HA)

CULTIVATOR TERACTIV



TERACTIV

With this frame specially developed for difficult soil conditions, the entire row can be worked quickly and optimally in just one pass. The special kinematics of the mechanical NONSTOP overload protection works continuously and loosens the soil sustainably. Due to the special share shape, the tools are pulled quickly into the soil. Any organic matter can be reliably worked in, producing an intensely mixed soil. For short headlands, the machine is optionally available with hydraulic vertical lift of 75°.

TECHNICAL DATA

Hydraulic requirement: only with option 1x d.a.
Weight without attachments: approx. 463 lbs
Frame adjustment: 44.5 – 63.4 in

Row width with RADIUS:
370 share: 75.2 - 94.1 in
500 share: 85.4 - 104.3 in
620 share: 94.9 - 113.8 in

TERACTIV DUO

The cultivator for the cultivation of open and green rows in alternation. With the TERACTIV DUO you have on the one hand the option to work the row completely and on the other hand to carry out in a covered lane exclusively the undervine care. For this purpose, the frame with the spring tines is lifted by 75° and the roller is folded downwards, which stabilises the frame by resting on the covered lane while working in the area between the vines. The part of the frame on which the RADIUS SL or RADIUS SL PLUS weeder units are mounted is optionally hydraulically adjustable.

TECHNICAL DATA

Hydraulic requirement: 2x d.a.
Weight without attachments: approx. 882 lbs
Frame adjustment: 44.5 – 63.4 in

Row width with RADIUS:
370 share: 74.8 - 96.1 in
500 share: 74.8 - 106.3 in
620 share: 94.5 - 115.7 in

TERACTIV EASY

Similar to the TERACTIV, the TERACTIV EASY optimally intermixes and ventilates the soil with its integrated spring package in each tine unit. However, the frame construction is designed as a rigid variant and thus guarantees stability even in difficult conditions. By using cranked tines, rows from a width of 70.9 in can be processed.

TECHNICAL DATA

Hydraulic requirement: none required
Weight without attachments: approx. 992 lbs
Frame adjustment: 46.5 – 65.4 in

Row width with RADIUS:
370 share: 75.6 - 94.5 in
500 share: 85.8 - 104.7 in
620 share: 95.3 - 114.2 in

TERACTIV FLEX

The special feature of the TERACTIV FLEX within this product group is its hydraulic width adjustment. RADIUS SL, RADIUS SL PLUS, GSP disk, finger roller and finger hoe can be attached to the cultivator to combine further operations. The working depth can be optimally regulated via a top link between the equipment frame and the roller frame (optionally crumbling or cage drum roller). Further mounting options are also possible.

TECHNICAL DATA

Hydraulic requirement: 1x d.a.
Weight without attachments: approx. 1488 lbs
Frame adjustment mechanical: 54.2 – 75.4 in

Row width with RADIUS:
370 share: 83.3 - 104.6 in
500 share: 93.5 - 114.8 in
620 share: 103 - 124.5 in

LIFTERS



S5

The 1- or 2-sided installation of the column lifter in the area between the axles allows you to simultaneously work on the undervine area while another machine is mounted in the front and/or rear of the tractor. The single-acting version uses a support wheel for depth regulation, for extremely hard soil conditions a double-acting version is also available.

TECHNICAL DATA

Weight without attachments: approx. 110 lbs
Length x width x height: approx. 27.6x7.9x39.4 in
Stroke (maximum): 19.7 in



ATLAS

The ATLAS mast is characterized by the hexagonal profile proven with the HEXAGON frame. Due to its construction and the resulting load capacity, it is ideally suited for increasing demands. In combination with the hydraulic lateral inclination, the working implement can be optimally placed in working and driving positions. Adaptability of attachments of all brands.

TECHNICAL DATA

Hydraulic requirement: 1x single-acting
Weight without attachments: approx. 220 lbs
Length x width x height Lift mast (retracted)
approx. 7.5x11.8x53.3 in
Stroke (maximum): 37.4 in



VITICULTURE



FRUIT GROWING



TREE NURSERIES



3-POINT + S2R

Front mount with 3 point linkage. The compact solution for multiple CLEMENS products like the ECO-ROLL, SB COMPACT, SB2, SB MONO, etc... Allows easy attachment of the tools. Easy way to upgrade your tractor with a 3-point linkage.

TECHNICAL DATA

Hydraulic requirement: 1x single-acting or 1x double-acting
Weight without attachments: approx. 265 in
Length x width x height: approx. 18.7x30.3x54.1 in
Stroke (maximum): 19.7 in



OVER THE ROW

Simple front mounting with over-the-row frame. Can be easily adapted to mast from other manufacturer. The distance between both arms can be adjusted hydraulically and mechanically. To reduce the risk of collision a spring is mounted on the arm opposite to the tractor.

TECHNICAL DATA

Working height (with 22.5° tilt): 22.8 in
Length x width x height: 28.7x35.4x68.9 in
Weight: approx. 190 lbs

MID-MOUNTING FRAME



The execution of multiple operations in one pass saves time and money. Oftentimes though, the length will be unhandy or impractical, if working machines are mounted in the front and rear. Our side-mounting frame offers an efficient and compact solution, as it serves as an adapter for our series of undervine care equipment. The basic frame with the column lifters is fixed and can be equipped with the currently required implement. The frame can be attached to different tractors using the respective mounting brackets.

- ✓ Efficient
- ✓ Comfortable
- ✓ Adaptable

TECHNICAL DATA

Hydraulic requirement: 1x double-acting

Weight without attachments:
approx. 276 lbs (depending on variant)

Dimensions without attachments:
2-sided with 10.6 in cylinder: about 17.5 x 29.1 x 9.1 in
2-sided with 16.9 in cylinder: about 17.5 x 43.3 x 9.1 in
1-sided with 10.6 in cylinder: about 17.5 x 26.2 x 9.1 in
1-sided with 16.9 in cylinder: about 17.5 x 40 x 9.1 in

SEED DRILL



SEED DRILL MECHANICAL

Unproblematic mounting and simple application. Suitable for rotary harrows, cultivators, WIESENHOBEL and other tillage implements. The light and solid machine is almost completely made of stainless steel and convinces by the gentle spreading of the seeds. The spread rate can be precisely dosed.

TECHNICAL DATA

Filling capacity:
Model 39.4 in: approx. 24 gal
Model 78.7 in: approx. 48 gal
Number of outlets: Model 39.4 in: 15 pcs., Model 78.7 in: 28 pcs
Weight without contents: Model 39.4 in: approx. 99 lbs
Model 78.7 in: approx. 161 lbs
Length x width x height:
Model 39.4 in: approx. 18.9 x 42.3 x 20.1 in
Model 78.7 in: approx. 18.9 x 81.9 x 21.5 in



SEED DRILL PNEUMATIC

The pneumatic seed drill offers many advantages. The electrically controlled seed shaft transports the seed from the container into the air channel. Here the seed is conveyed with the aid of the blower via flexible hoses to the baffle plates and distributed evenly and close to the ground. This ensures exact seed application even in windy conditions!

TECHNICAL DATA

Filling capacity: Model PS120: approx. 31.7 gal
Model PS200: approx. 53 gal
Number of outlets: Both models: 8 pcs.
Weight without contents:
Model PS120: approx. 99 lbs
Model PS200: approx. 132 lbs
Length x width x height:
Model PS120: approx. 35.4 x 23.6 x 31.5 in
Model PS200: approx. 39.4 x 27.6 x 35.4 in


SOIL CULTIVATION ECO-ROLL



RIGID



**HYDRAULICALLY
ADJUSTABLE**

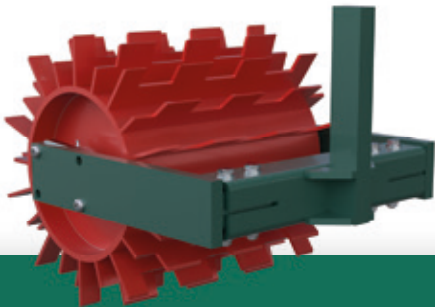

**FOR OVER-ROW
TRACTORS**

The BIO mulch roller ECO-ROLL is the alternative to mulching. The roller can be run without any problems during any operation. The ECO-ROLL compresses the vegetation, whereupon the spades mounted on the roller kink the stalks and thus fold them over. The result is a mulch carpet that promotes good shadow fermentation. The plants sprout again at the vegetation point and provide the next organic carpet. With legumes, this method stimulates the growth of the nodule bacteria (rhizobia) and increases the nitrogen-collecting effect.

TECHNICAL DATA

ECO-ROLL 400 (For high wheel tractors):
 ECO-ROLL 500 (For high wheel tractors):
 ECO-ROLL 600 (For high wheel tractors):
 ECO-ROLL 1000:
 ECO-ROLL 1200:
 ECO-ROLL 1300:
 ECO-ROLL 1350:
 ECO-ROLL 1400:
 ECO-ROLL 1500:
 ECO-ROLL 1600:
 ECO-ROLL 1800:
 ECO-ROLL 2000:

WORKING WIDTH

15.7 in
 19.7 in
 23.6 in
 39.4 in
 47.2 in
 51.2 in
 53.1 in
 55.1 in
 59.1 in
 63 in
 70.9 in
 78.8 in

EXTERNAL SIZE

19.1 in
 23 in
 27 in
 42.7 in
 50.6 in
 54.5 in
 56.5 in
 58.5 in
 62.4 in
 66.3 in
 74.6 in
 82.5 in

WEIGHT WITH 3 POINT FRAME

approx. 253 lbs
 approx. 298 lbs
 approx. 342 lbs
 approx. 611 lbs
 approx. 692 lbs
 approx. 727 lbs
 approx. 750 lbs
 approx. 783 lbs
 approx. 827 lbs
 approx. 869 lbs
 approx. 1041 lbs
 approx. 1129 lbs



SOIL CULTIVATION ROTARY HARROW



ASCOT

Whether mechanical soil cultivation, seedbed preparation or optimum levelling of the tramline. The Ascot power harrow is a reliable and low-maintenance aid for all work in your row crops. The vertically rotating knives of the rotary harrow ensure a perfect track without soil compaction, which is of benefit to you for subsequent maintenance work. The double-bearing tines are driven by a robust spur gear running in fluid grease. For a particularly even soil surface, a spindle-adjustable levelling coulter is optionally available. is available. The drive is via a 540 rpm PTO shaft.

TECHNICAL DATA

Total width:
Working width:
Tine units:
Weight with cage roller:
Weight with packer roller:

ASCOT 100

41.1 in
37.8 in
5/10
730 lbs
776 lbs

ASCOT 120

48.1 in
44.9 in
6/12
805 lbs
862 lbs

ASCOT 140

55.2 in
52 in
7/14
880 lbs
948 lbs



VITIS

Mechanical soil cultivation, seedbed preparation and optimum levelling of the ground. Perfect surface for subsequent maintenance work without soil compaction due to vertically rotating blades. The tines are mounted in three bearings and are driven by a robust spur gear running in fluid grease. The shaft units are self-lubricating. A spindle-adjustable levelling bar is available as an option.

TECHNICAL DATA

Total width:
Working width:
Tine units:
Weight with cage roller:
Weight with packer roller:

VITIS 100

36.8 in
31.7 in
3/6
955 lbs
1071 lbs

VITIS 125

49.4 in
45.3 in
5/10
1177 lbs
1345 lbs

VITIS 140

56.1 in
53.9 in
6/12
1272 lbs
1464 lbs

VITIS 170

66.7 in
62.6 in
7/14
1391 lbs
1616 lbs

VITIS 190

75.4 in
71.3 in
8/16
1501 lbs
1753 lbs

SOIL CULTIVATION MULCHER



VITICULTURE



FRUIT GROWING



TREE NURSERIES



Variable mulcher for wine and fruit growing works excellently in vegetation management and is also suitable for shredding vine cuttings. It is driven by a 540 rpm PTO and a factory supplied cardan shaft with slip clutch. A double-acting control unit is required for hydraulic width adjustment. The two rotating blade carriers, each equipped with two freely movable blades, guarantee a high mulching speed with low power requirement. The cutting height is adjusted at the front by large adjustable support wheels and at the rear by a continuously adjustable roller. This guarantees the best running characteristics, even on uneven terrain. Maintenance-friendly due to few lubrication and oiling points and low-wear blades.

- ✓ Variable
- ✓ Stable
- ✓ Agile



TECHNICAL DATA

Weight: 1058-1300 lbs
Working width, min/max.:
Model S: 45.3-57.1 in
Model M: 51.2-68.9 in
Model L: 55.1-74.8 in
Model XL: 63-84.6 in

Required tractor power:
Model S, M, L: 50-70 HP
Model XL: 60-80 HP

Three point category: 1/2



“

Why CLEMENS? „Because of the proximity of the dealer, the good reputation of the brand and to be able to work in different widths.“

MR ALAUZEN, WINERY DOMAINE DES MATASSIÈRES (120 HA)

CONTROL C-DRIVE

		NUMBER OF FUNCTIONS						
		1	2	3	4	5	6	7
	SHUTTLE VALVES VALVE For hand lever, 1 D.A.	●	●	●	●	●		
	SHUTTLE VALVES VALVE Selectable with signal cables via the tractor's joystick, 1 D.A. to 3 functions, 2 D.A. To 56 functions	●	●	●	●	●	●	
	SPLITT VALVES SPLITT VALVE 1 D.A. with floating position 1 S.A.+ free return	●	●					
	MONO BLOCKS C.CONTROL STANDARD Control unit block, 3 D.A.	●	●	●				
	MONO BLOCKS C.CONTROL STANDARD + VALVE Control unit block, 3 D.A. + 1 S.A	●	●	●	●			
	MONO BLOCKS C.CONTROL COMFORT Control unit block, 4 D.A.	●	●	●	●			
	MONO BLOCKS C.CONTROL COMFORT + VALVE Control unit block, 4 D.A.+ 1 S.A	●	●	●	●	●		
	MONO BLOCKS C.CONTROL TWIN Control unit block, 2 D.A, 2 S.A with floating position	●	●	●	●			
	MONO BLOCKS C.CONTROL TWIN + VALVE Control unit block, 2 D.A, 2 S.A with floating position + 1 D.A	●	●	●	●	●		
	PROPORTIONAL PILOT-OPERATED HYDRAULIC BLOCKS C.CONTROL COMFORT PLUS Hydraulic block 5 D.A	●	●	●	●	●		
	PROPORTIONAL PILOT-OPERATED HYDRAULIC BLOCKS C.CONTROL PREMIUM Hydraulic block 7 D.A, also available with hydraulic block 5 D.A	●	●	●	●	●	●	●



You do not have enough control valves on your tractor to operate different hydraulically driven implements or adjustment functions at the same time? With the C.DRIVE system, we offer you a convenient and cost-effective solution. The large variability from 3 to a maximum of 7 additional valves enables the exact adaptation to your requirements. These valves (and also certain tractor functions) are operated via a touch screen and a multifunction joystick in the driver's cab.

- ✓ Progressive
- ✓ Intelligent
- ✓ Sustainable



OPTIONS

- On request also proportional blocks up to 12 double-acting functions
- Presetting possible via CLEMENS application via smartphone

VITICULTURE APP MOOSLE

Less paperwork. More viticulture.



Christoph Kinn

Moosle is a state-of-the-art cloud software solution that provides you with detailed and smart support throughout your outdoor operations. Whether it's a job index, task planning, documentation, inventory monitoring, integration of telemetry or analysis of your workflows: You have everything you need for efficient operations management under one roof, without having to sacrifice time for complex administration. It doesn't matter whether you use Moosle with a mobile phone, tablet or PC: All functions are always available to you - even in a dead zone. In addition to built-in navigation functions, the user-friendly Moosle app is currently available in 12 different languages, so that every worker can enjoy the benefits of the app without any misunderstandings.

- ✓ Simple operation
- ✓ Time-saving
- ✓ Modular

LIVE-TRACKING

The tractor operator can additionally record his work by GPS and thus no longer has to worry about forgetting individual areas. Not even when driving with multiple machines, because the progress synchronizes

on all devices in real time. As a boss, you always have an overview of where your employees are currently working.



Easy registration,
test immediately!

PLANT PROTECTION/ FERTILIZER

The inventory of all consumables can be managed in Moosle. Especially the consumption of pesticides and fertilizers are documented separately and prepared professionally. This way, even organic winegrowers can calmly look at the documentation.

TASK PLANNING

With the program, work orders can be sent to all employees in seconds. If workers are not familiar with your vineyards, they can be guided to the

HIGHLIGHTS

- Smart Impact file
- Claims management
- Machine management
- Documentation
- Stock monitoring
- Multilingual
- Analysis of the work flow
- Integration of telemetry (indiv. settings)

fields via our fully integrated navigation function. While they work through the task, the winemaker always has an overview of the current progress and can view detailed evaluations of hectare speeds and other key figures of the work progress.



“

„With Moosle, we have found a software that makes life easier for us. We effortlessly document our crop protection additionally because we have Moosle running on our mobile phone in the tractor.“

JÖRG BERNHARD - WINERY BERNHARD



Since its foundation in the year 1952 by Bernard and Mathias Clemens, the CLEMENS Company has been producing vineyard and agricultural machines with superior strength and durability. The company is family owned and is represented today by Thomas and Bernhard Clemens, both sons of Bernard. CLEMENS develops, manufactures and distributes high quality, unique and innovative products like the RADIUS Around-the-vine Weeder, HEXAGON, a strong utility frame for different cultivation tools and ROTARY BRUSH for sucker removal, and several

more machines for various applications. CLEMENS machines are the key to successful vineyard management. Besides special services for winery technologies, we also supply special tank-designs with equipment and materials based on the customer's demand. Individual tasks are always taken care of with total dedication, to ensure our client's needs are fulfilled. More than 80% of all products are exported all over the world, which shows the strength and demand of our machines. Currently CLEMENS is represented in more than 35 countries.

